


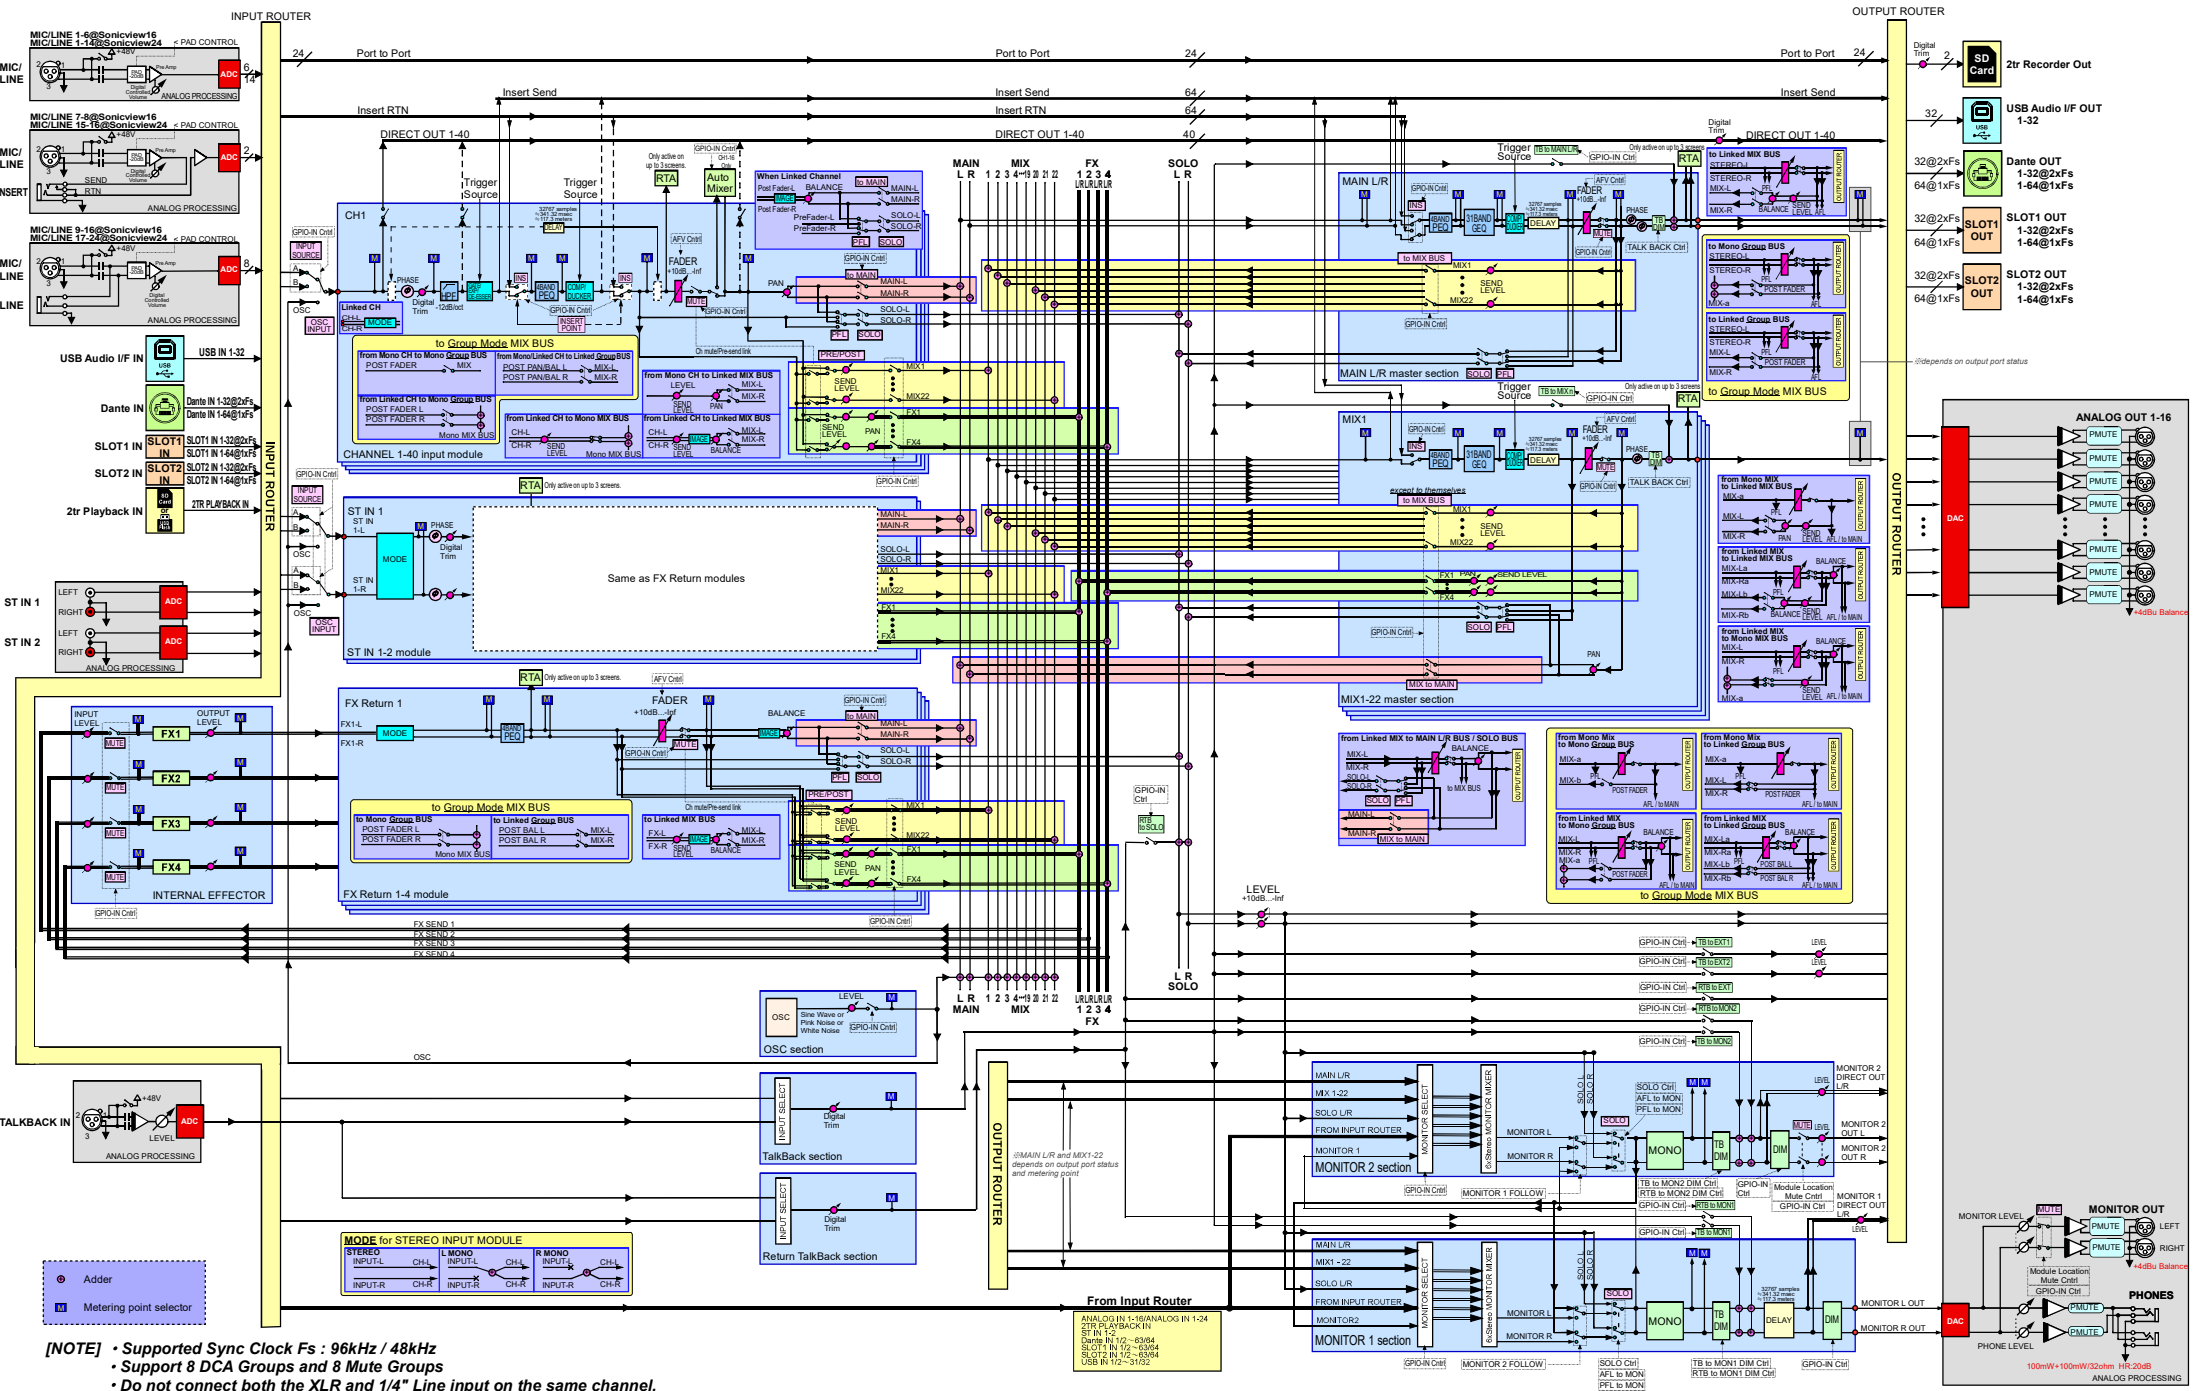

- [NOTE]
- Supported Sync Clock Fs : 96kHz / 48kHz
 - Support 8 DCA Groups and 8 Mute Groups
 - Do not connect both the XLR and 1/4" Line input on the same channel.
 - Comp Key-in Trigger Source : SELF, CH1-40 Pre Comp, MIX1-22 Pre Comp, MAIN L/R Pre Comp
 - Ducker Key-in Trigger Source : none, CH1-40 Post Fader, MIX1-22 Post Fader, MAIN L/R Post Fader

Sonicview 16/Sonicview 24 Mixer Audio Block Diagram