


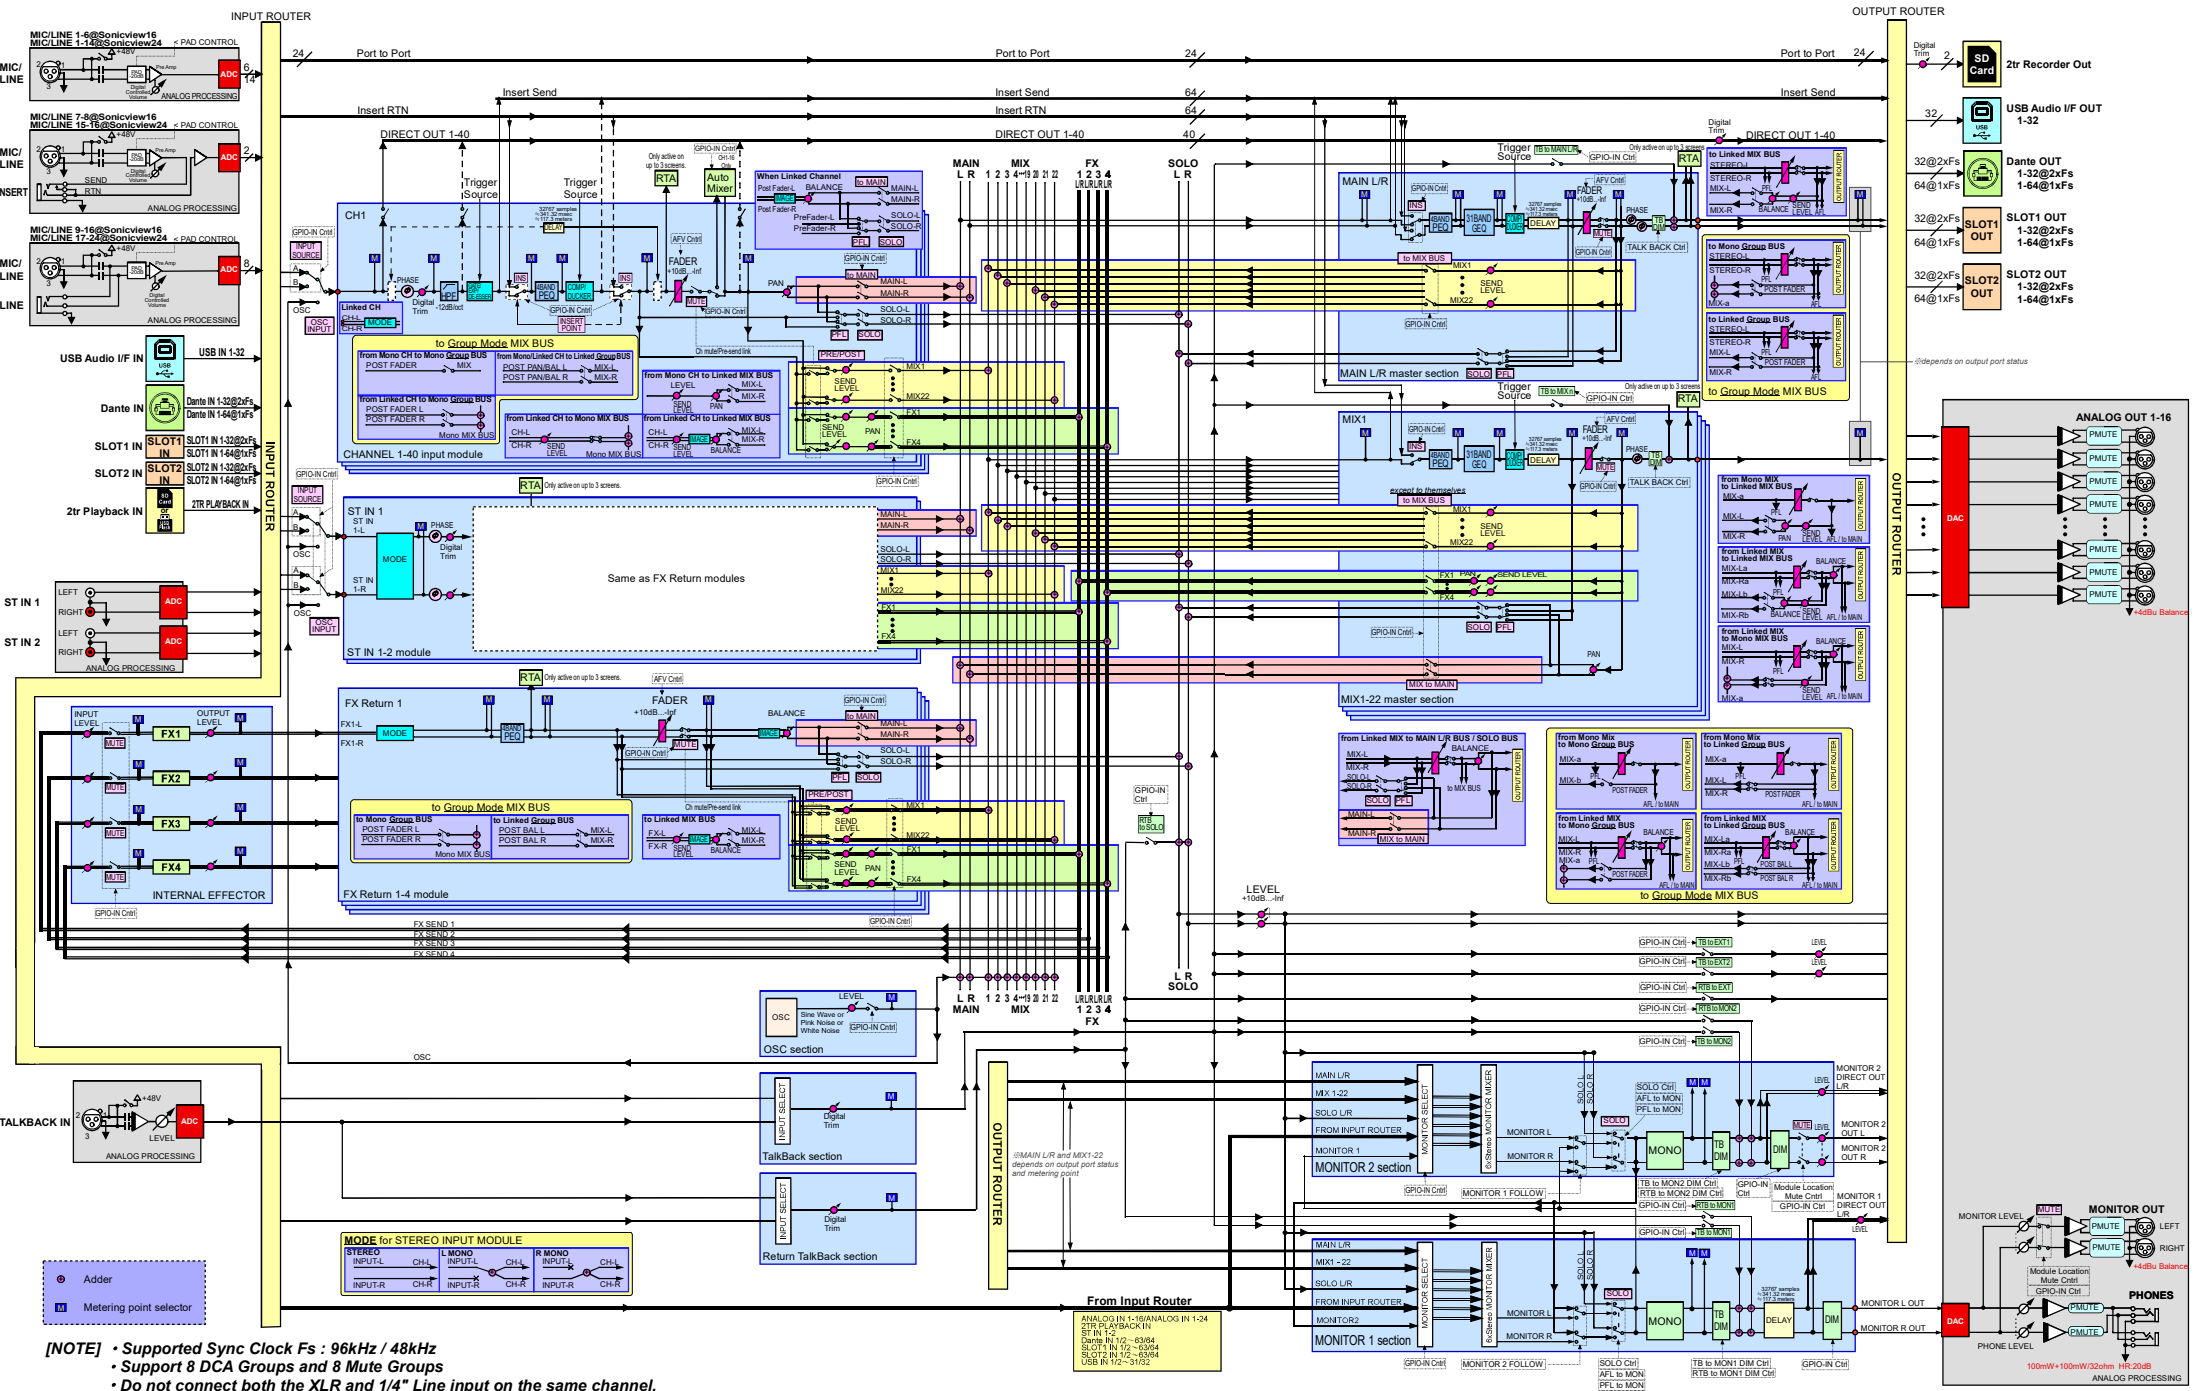

[NOTE] • Supported Sync Clock Fs : 96kHz / 48kHz
• Support 8 DCA Groups and 8 Mute Groups
• Do not connect both the XLR and 1/4" Line input on the same channel.
• Comp Key-in Trigger Source : SELF, CH1-40 Pre Comp, MIX1-22 Pre Comp, MAIN L/R Pre Comp
• Ducker Key-in Trigger Source : none, CH1-40 Post Fader, MIX1-22 Post Fader, MAIN L/R Post Fader

Sonicview 16/Sonicview 24 Mixer Audio Block Diagram